

CLAMP FOR LIFTING CONCRETE BLOCKS AND NEW JERSEY BARRIERS



Model	Load MAX	Jaw opening	Grip depth	Jaw length	Weight
	KG	MM	MM	MM	KG
PNJA	5000	25/400	200	500	220
PNJA	6000	25/400	200	500	220
PNJA	8000	50/400	200	850	430

CONFORME UNI EN 13155

STANDARD - MODELLO PNJA :

- Automatic Jaw Block
- Cut-resistant rubber gripping jaws
- Galvanic zinc coating

AVAILABLE CONFIGURATIONS



BLACK RUBBER GRIPPING JAWS

Allows the handling of concrete products without causing any damage to the surface. The grip may leave a slight black imprint. The rubber surface is subject to wear and, when used on very rough and coarse surfaces, it may sustain damage due to high stress concentrations.



SPECIAL COLOR OPTIONS UPON REQUEST

The standard surface finish is galvanic zinc coating. Color customization is available upon request.



STEEL JAWS



Equipped with pointed protrusions that penetrate the surface, ensuring unparalleled grip. Highly recommended for intensive use of the equipment and for handling highway barriers, such as New Jersey barriers. This accessory slightly damages the contact surface.



AUTOMATIC CLAMP LOCKING

The clamping and releasing phases of the clamp are autonomously managed by a simple mechanical system. This allows the crane operator to control the clamp without needing to be in close proximity to it.

CLAMP FOR ROAD BARRIER

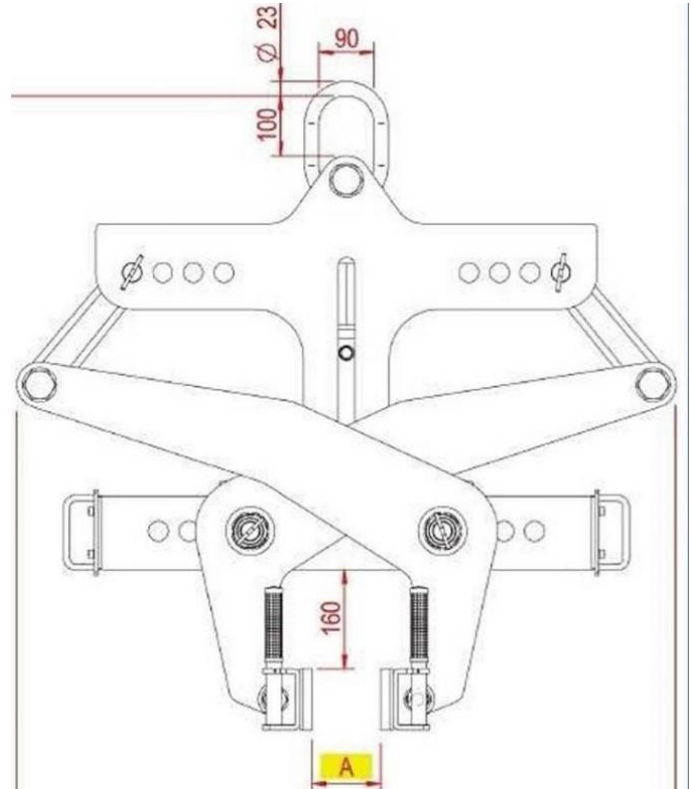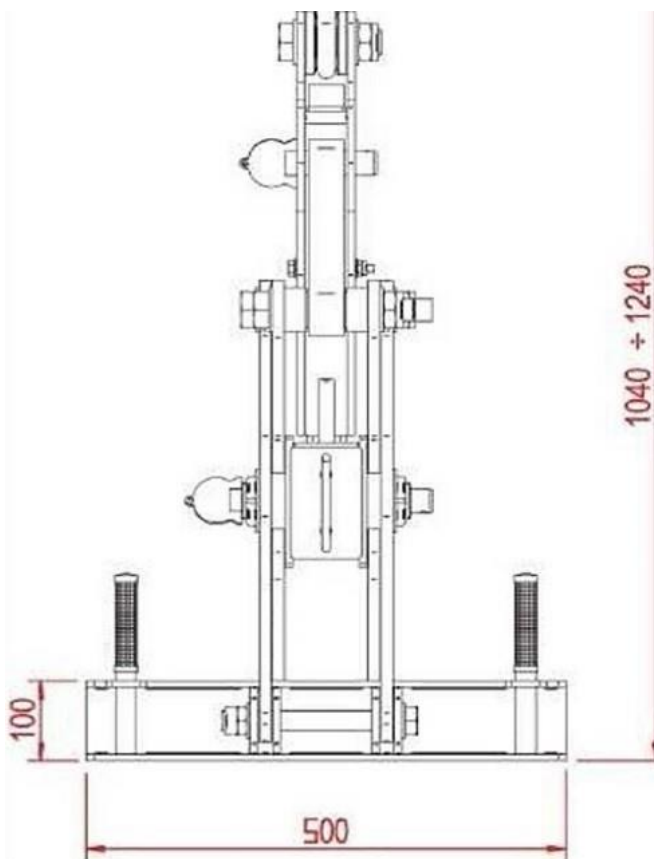

Maximum LOAD: 5000 – 6000 - 8000 kg.


Opening JAW: 20 ÷ 400 mm.

Surface finish: galvanic zinc coating.

Tilting jaws with spring return to adapt the grip to inclined surfaces.

Standard equipment includes: Suspension ring, Automatic locking mechanism, Rubber grips or hardened steel grips.

CE-certified product, supplied with User and Maintenance Instructions.



GOMMATECH

ITALIAN QUALITY
PRODUCT

For further information and quotes:

E-mail: italcomsrl.it@gmail.com

Mobile (also available on WhatsApp):

- +39 391 4015206 International Sales Office (English language);
- +39 329 0047530 Sales Office (Italian language).
- Web site www.gommatechsrl.com

